

Sterling Disposable Locks

DL-2S-3

Two screw model
with 3" shackle




DL-1S-3

One screw model
with 3" shackle



DL-2S-2

Two screw model
with 2" shackle

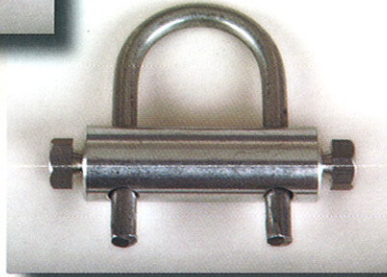

DL-1S-2

One screw model
with 2" shackle



Aluminum body, Alumoweld shackle
and aluminum screws.

The screws breakaway at a consistent
torque leaving a smooth surface. The
Alumoweld shackle has the strength of
the steel core and the corrosion protection
of the aluminum cover jacket. The two
screw model has been tested to over 1200
pounds without failure.


- MADE IN THE USA
- VANDALISM PREVENTION
- LIABILITY PROTECTION



- For serializing/customizing call factory

Excellent for areas that are not accessed often.
Much less expensive than a padlock.
More substantial than a wire seal.

width after installation:	all 1.9" (48.2mm)
body diameter:	all .62" (15.8mm)
overall height:	3" locks 3.25" (82.6mm)
overall height:	2" locks 2.25" (57.2mm)
shackle diameter:	all .205" (5.2mm)

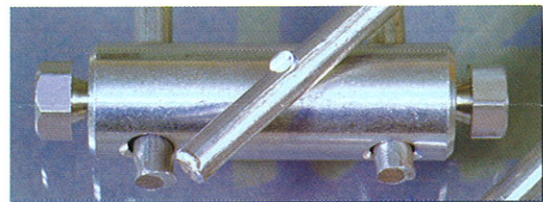

Optional stop keeps body in
position for convenient removal



SECURITY SYSTEMS

A DIVISION OF ENGINEERING UNLIMITED

1320 12th Avenue North
tel 800-515-4040
tel 612-522-4040

Minneapolis, MN 55411-4063
fax 800-515-2829
fax 612-522-2829

www.sterlingpadlocks.com eui@engunl.com